

**SAM 010-130 DIN is a series of light weight casing axial piston motors, particularly suitable for mobile hydraulics. SAM 010-130 DIN is of the bent-axis type with spherical pistons.**

The design gives a compact motor with few moving parts, high starting torque and high operational reliability. It covers the entire displacement range 0.59 - 7.93 cu in/rev. with maximum pressure 5075 psi.

It's high level of reliability is due to the choice of materials, hardening methods, surface structures and the quality assured manufacturing process.

**Other advantages:**

- Light weight metal casing design
- Smooth operation over the entire speed range
- High efficiency
- Suitable for applications with high angular accelerations due to its high rotary stiffness
- Corrosion free light metal-housing
- Less heat generation due to better ability to dissipate heat through housing

## Versions, main data

Example

SA	M	-	012	W	-	N	-	DL4	-	L35	-	S3	G	-	1	00
Line	1		2	3		4		5		6		7	8		9	10

Line	SA	Sunfab Aluminium
------	----	------------------

1. Type	M	Motor
---------	---	-------

2. Displacement	010	012	017	025	034	040	047	056	064	084	090	108	130
-----------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

3. Direction of rotation	W	Independent
--------------------------	---	-------------

4. Sealing	N	Nitrile
------------	---	---------

5. Mounting flange	ISO 7653-D
DL4	ø 80

6. Shaft	DIN 5462 / ISO 14
L35	8x32x34.9

7. Connection cover		010	012	017	025	034	040	047	056	064	084	090	108	130
S3	40° threaded connection	X	X	X	X	X	X	X	X	X	X	X	X	X

8. Connections		010	012	017	025	034	040	047	056	064	084	090	108	130
G	ISO G	X	X	X	X	X	X	X	X	X	X	X	X	X

9. Additional		1	External drainage
---------------	--	---	-------------------

10. Speed sensor		010	012	017	025	034	040	047	056	064	084	090	108	130
00	No speed sensor	X	X	X	X	X	X	X	X	X	X	X	X	X

X = Standard, preferred  
O = Contact Sunfab



<b>Motor SAM 010-130 DIN</b>		010	012	017	025	034	040	047	056	064	084	090	108	130
Displacement	cu in/rev	0.59	0.77	1.04	1.55	2.09	2.51	2.87	3.42	3.88	5.10	5.53	6.59	7.93
Working pressure														
max intermittent	psi	5800	5800	5800	5800	5800	5800	5800	5800	5800	5800	5800	5800	4785
max continuous		5075	5075	5075	5075	5075	5075	5075	5075	5075	5075	5075	5075	4060
Revolutions														
max intermittent	rpm	3000	3000	3000	3000	3000	2500	2500	2500	2500	2000	2000	2000	2000
max continuous		2400	2400	2400	2400	2400	2000	2000	2000	2000	1600	1600	1600	1600
min continuous		300	300	300	300	300	300	300	300	300	300	300	300	300
Power														
max intermittent	hp	19	24	32	48	66	76	87	105	118	125	136	161	166
max continuous		15	19	25	39	52	62	70	83	54	99	110	129	133
Starting torque theoretical value	lb-ft/1000psi	8	10	14	20	27	33	38	45	51	67	73	87	105
Moment of inertia (x 10 <sup>-3</sup> )	lb-ft-sec <sup>2</sup>	0.7	0.7	0.7	0.8	0.8	1.9	1.9	1.9	1.9	5.5	5.5	5.5	5.5
Max intermittent housing pressure	psi	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	72.5	75.5	72.5	72.5
Weight	lb	15.2	15.2	15.2	15.7	15.7	21.6	21.6	21.6	21.6	30.6	30.6	30.6	30.6

Intermittent operation refers to a max of 6 seconds per minute, representing e.g. peaks in rotational speed during unloading and acceleration.

# General instructions

## Shaft loads

The service life of the motor largely depends on the service life of the bearings. These are affected by the operating conditions such as speed, pressure, oil viscosity and degree of purification.

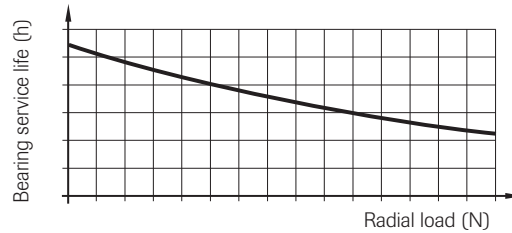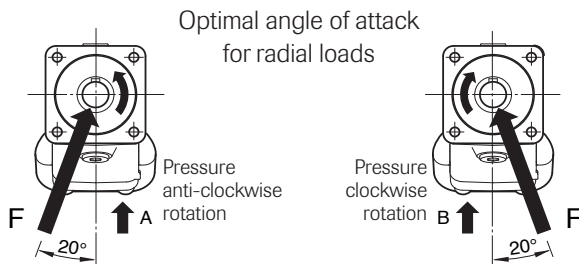


External loading of the shaft, its size, direction and location also affect the service life of the bearings.

If a calculation of bearing service life is required for special applications, contact Sunfab Hydraulics.

## Installation

The motor housing is filled with oil to at least 50% of the volume before start up. The drainage hose is connected to the drainage outlet positioned highest on the motor. The other end is connected below the oil level in the oil tank.

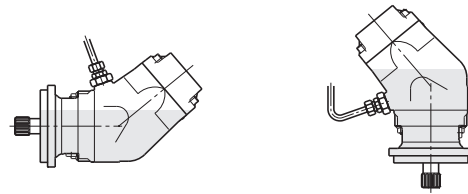

## Hydraulic fluids

High performance oil meeting the specifications of ISO type HM, DIN 51524-2HLP or better must be used. Min. viscosity 10 cSt is required to guarantee lubrication. Ideal viscosity is 20 - 40 cSt.

## Pipe dimensions

The recommended flow velocity in the pressure line is max 7 m/sec.

## Filtering

Cleanliness ISO norm 4406, code 16/13 is recommended.

## Useful formulaes

Required flow rate  $Q = \frac{D \times n}{1000 \times \eta_v}$  litres/min.

Speed  $n = \frac{Q \times 1000 \times \eta_v}{D}$  RPM

Torque  $M = \frac{D \times \Delta p \times \eta_{hm}}{6.3}$  Nm

Power  $P = \frac{Q \times \Delta p \times \eta_t}{60}$  kW

D = displacement, cm<sup>3</sup>/rev

n = revolutions, rev/min

P = power, kW

Q = flow, litre/min

$\eta_v$  = volumetric efficiency

$\eta_{hm}$  = hydromechanical efficiency

$\eta_t$  = total efficiency =  $\eta_v \times \eta_{hm}$

M = torque, Nm


$\Delta p$  = pressure difference between inlet and outlet on the hydraulic motor, MPa

# Dimensions SAM 010-034


## Flange, shaft & connection cover

Millimeter (inch)


### DL4 ISO 7653-D

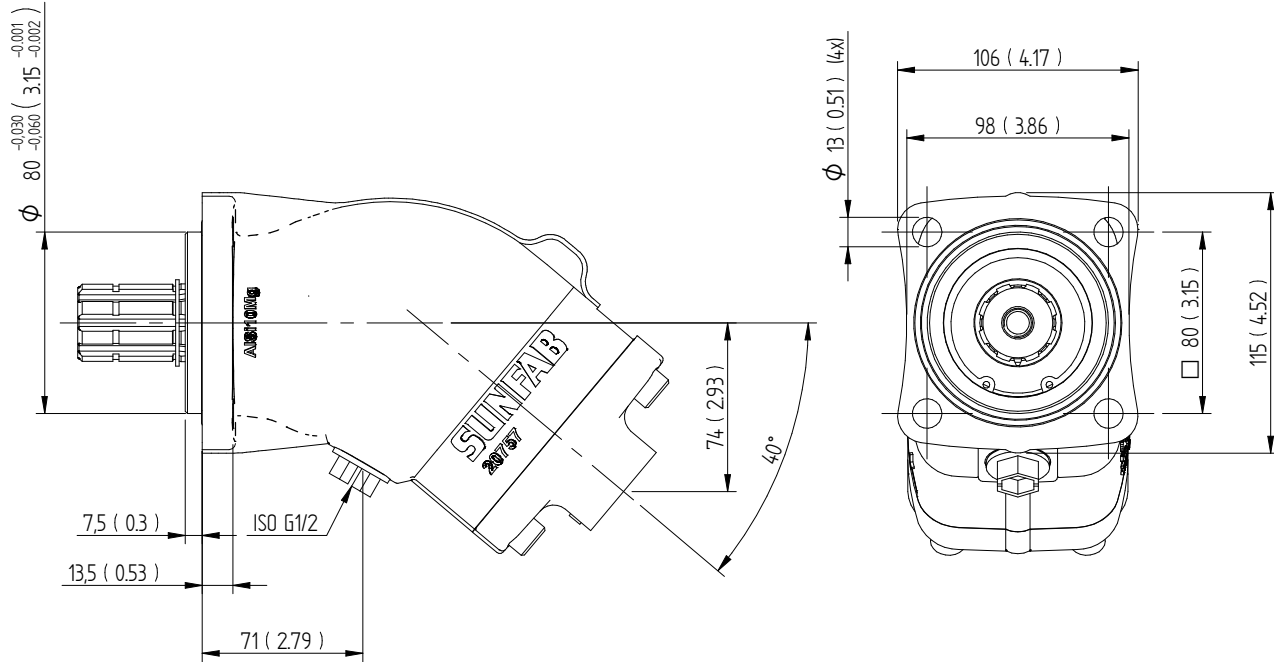

### L35 DIN 5462 / ISO 14

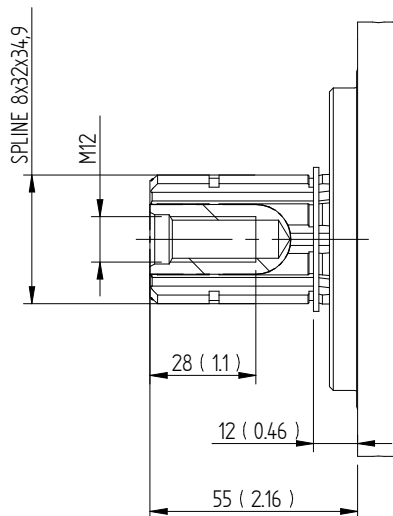

### S3G

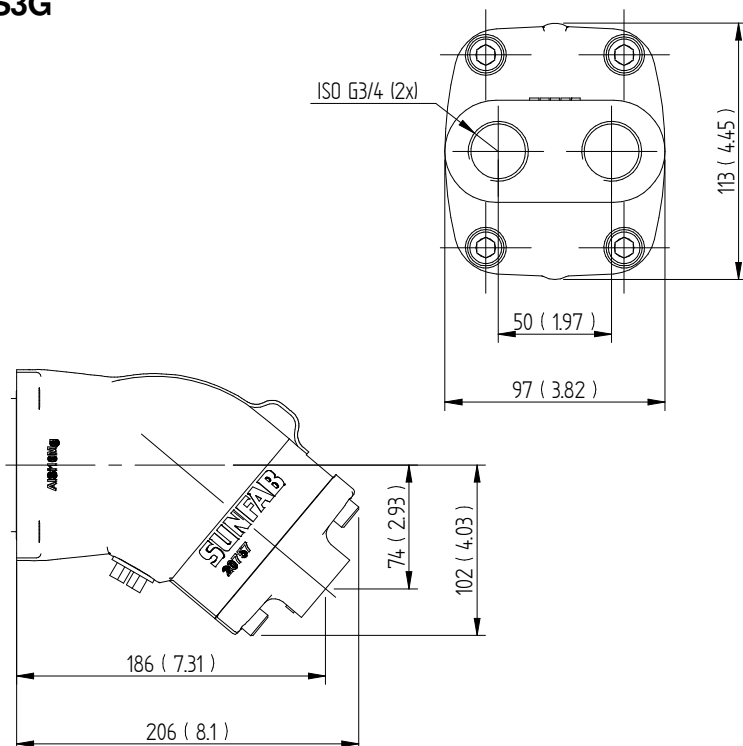


# Dimensions SAM 040-064


## Flange, shaft & connection cover

Millimeter (inch)


### DL4 ISO 7653-D

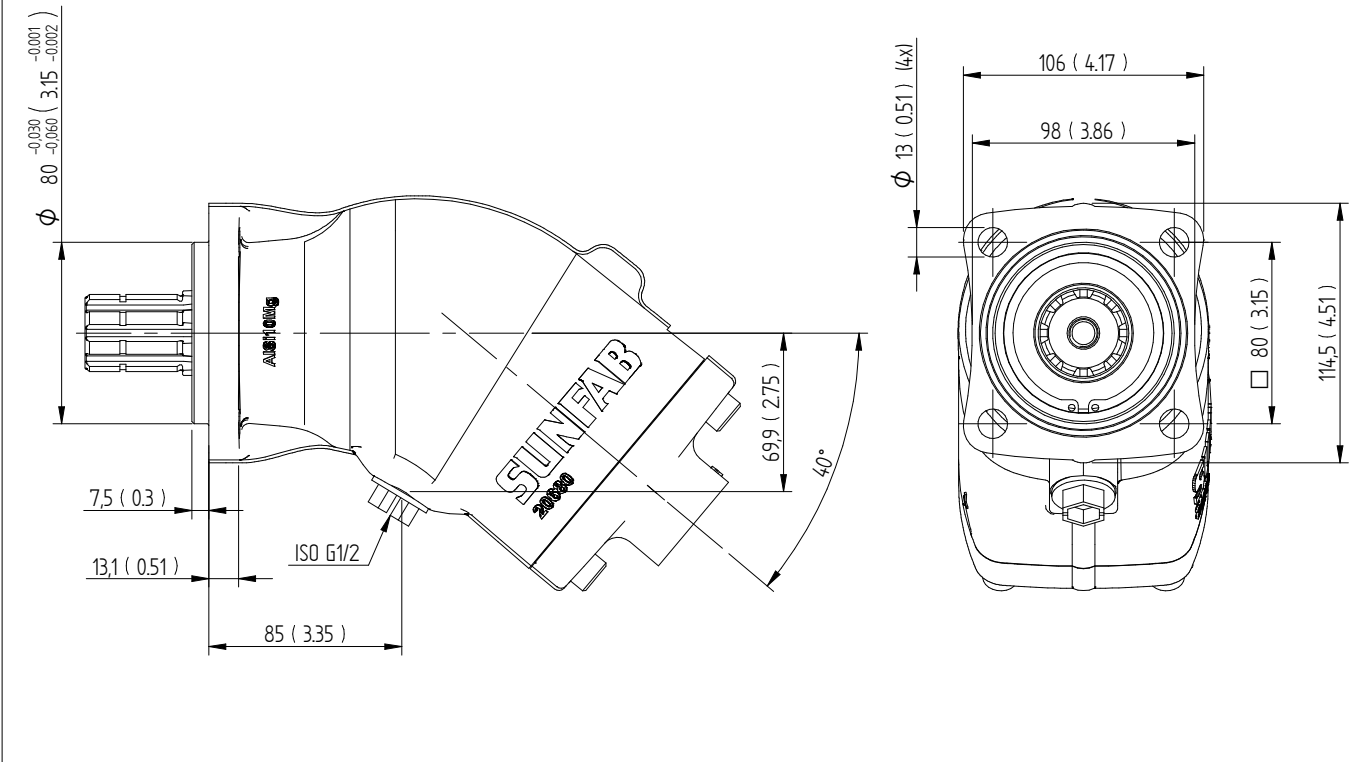

### L35 DIN 5462 / ISO 14

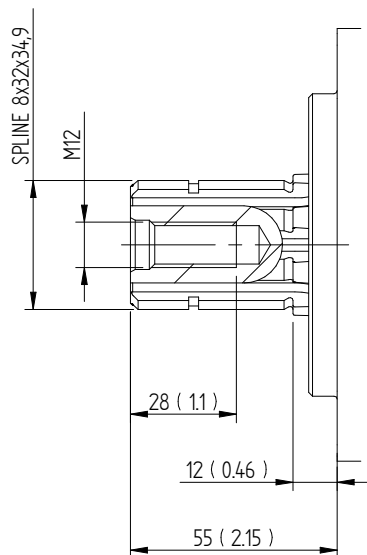

### S3G

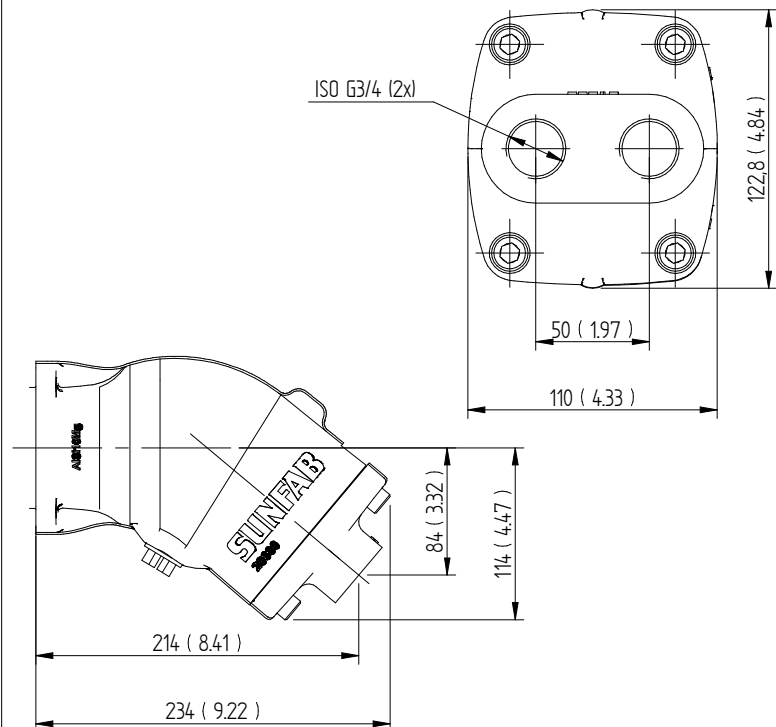


# Dimensions SAM 084-130


## Flange, shaft & connection cover

Millimeter (inch)


### DL4 ISO 7653-D

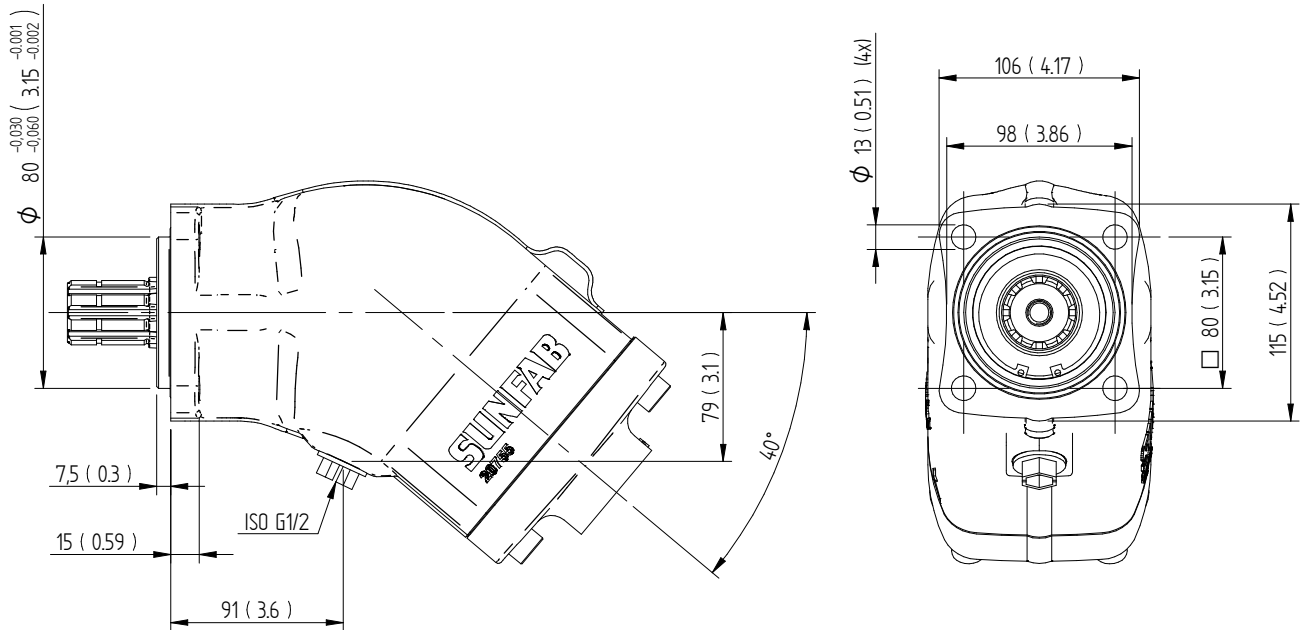

### L35 DIN 5462 / ISO 14

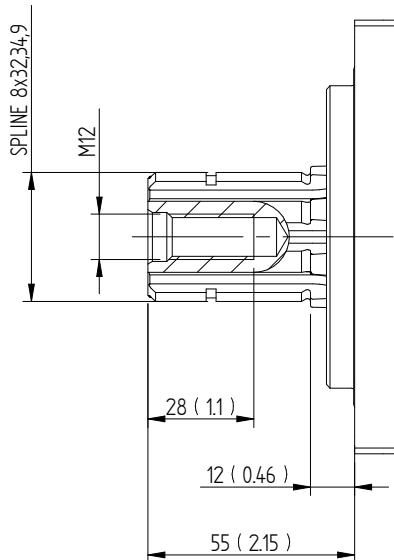

### S3G

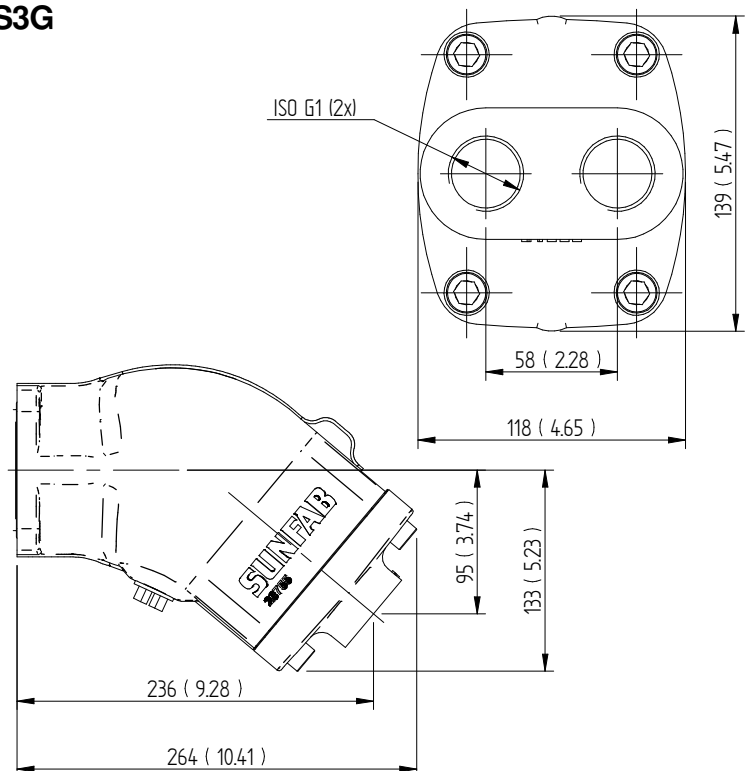



**WARNING**

When the motor is in use:

1. Do not touch the pressure pipe
2. Beware of rotating parts
3. The motor and pipes can reach high temperatures

*Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.  
© Copyright 2015 Sunfab Hydraulics AB. All Rights Reserved.*